



**Pinces tirées - Zugspannzangen - Pull-type collets**

**Pince de serrage - Spannzange - Clamping collet**

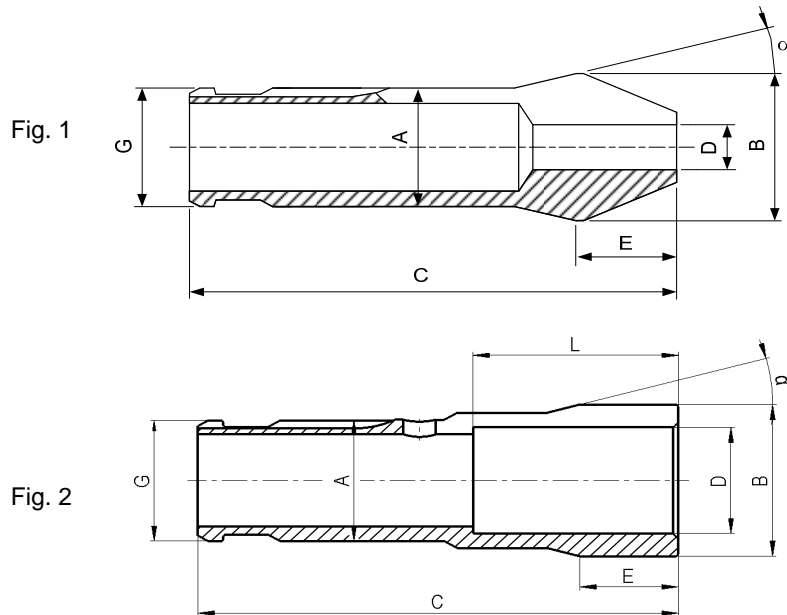


Type	Art.	A	B	C	E	G	$\alpha$	D min-max	L	Fig.
BCR32	<b>72-93235</b>	32	40	117	24	32	15°	0.30...24.00 24.01...28.00	- 64	1
	<b>72-93416</b> 26)	32	40	117	24	32	15°	Morse DIN228 MK-1	-	1
	<b>72-93417</b> 26)	32	40	117	24	32	15°	Morse DIN228 MK-2	-	1
	<b>72-93418</b> 26)	32	40	117	24	32	15°	Morse DIN228 MK-3	-	1
	<b>72-93670</b>	32	40	117	24	32	15°	28.01...32.00	50	2

Alésages standards (rond, carré, six-pans) selon liste de prix. Autres alésages sur demande.  
 Standardbohrungen (rund, vierkant, sechskant) gemäss Preisliste. Andere Bohrungen auf Anfrage.  
 Standard bores (round, square, hexagonal) according to price list. Other bores on request.

26) Sur demande - Auf Anfrage - On request

**Pince de traction pour BCR  
 Zugspannzange für BCR  
 Pull-type collet for BCR**

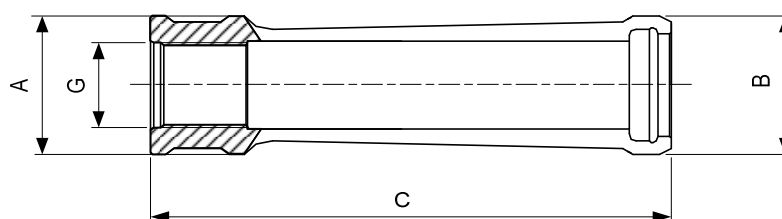

Type	Art.	A	B	C	G
D40	<b>74-60039</b>	40	40	133	M24x1.5