
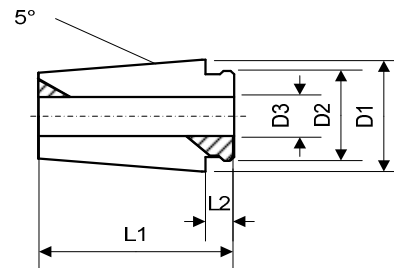


Pinces - Spannzangen - Collets


avec cône adapté pour la haute vitesse
 mit flachem Konus für hohe Drehzahlen
 with special taper for high-speed cutting

qualité UP serre le diamètre nominal
 Qualität UP spannt den Nenndurchmesser
 quality UP clamps the nominal diameter

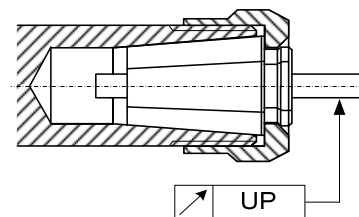

| Type | Art. | D1 | D2 | D3 | L1 | L2 |
|------|-----------------|-------|-------|--------------|------|-----|
| D6 | 74-6000 | 6.1 | 5.1 | 0.50...3.17 | 13 | 2.6 |
| D8 | 74-8000 | 8.13 | 6.85 | 0.50...5.00 | 16.5 | 2.8 |
| D10 | 74-10000 | 10.14 | 8.25 | 0.50...6.00 | 20 | 3 |
| D12 | 74-12000 | 12.65 | 9.35 | 0.50...7.00 | 24 | 3.2 |
| D14 | 74-14000 | 14.15 | 11.55 | 0.50...9.00 | 25 | 3.6 |
| D16 | 74-16000 | 16.65 | 12.9 | 0.50...10.00 | 28.5 | 4.2 |
| D20 | 74-20000 | 20.18 | 15.9 | 0.50...12.70 | 32 | 4.6 |
| D24 | 74-24000 | 24.18 | 19.4 | 0.50...16.00 | 35 | 5 |
| D29 | 74-29000 | 29.18 | 23.9 | 1.00...20.00 | 40 | 5.4 |

Alésages standards selon liste de prix. Autres alésages sur demande.
 Standardbohrungen gemäss Preisliste. Andere Bohrungen auf Anfrage.
 Standard bores according to price list. Other bores on request.